


FEP Tubing

Polyflon offers FEP tubes in IDs ranging from 0.2mm up to 100mm and due to FEP (Fluorinated Ethylene Propylene) being melt processable, very long continuous lengths are possible. Excellent chemical resistance, surface smoothness, transparency and purity of FEP tubing make it the material of choice in many fluid handling applications within the semiconductor, chemical process plant, instrumentation, bio-tech and medical markets.

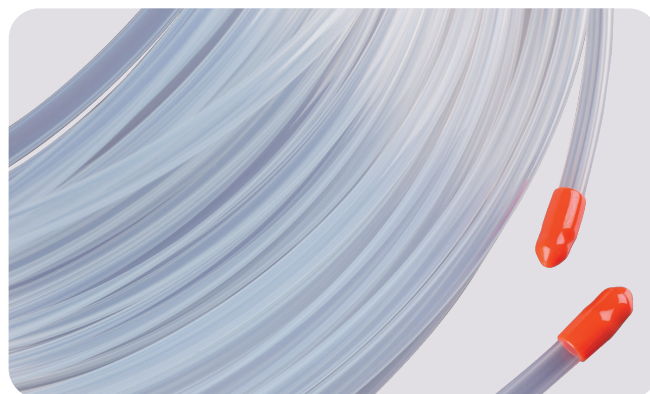

FEP tubing availability

- Long continuous lengths on spools or in coils
- Thermoformed into custom 2D & 3D shapes
- Tip forming: flanges, flares, draw downs, complex micro-moulded ends
- Ready assembled with connectors
- Straight pieces with clean, square cuts
- Bagged directly off extruder to maintain cleanliness
- Pigmentations, striped or solid.

Key features



Good optical clarity (96% UV transmission)



Very smooth internal surfaces



Reduced gas diffusion



Excellent chemical resistance



Ideal for thermoforming



Wide temperature range -254°C (-425°F) to 205°C (392°F)



Tight dimensional tolerances



Biocompatible



FDA & USP Class VI compliant



Gamma & ETO sterilisable

Standard metric sizes

ID	ID tol. +/-	OD	OD tol. +/-	W	MBR	W/P @ 23°C (bar)	B/P @ 23°C (bar)
1.00	0.10	2.00	0.10	0.50	8	22	112
2.00	0.10	4.00	0.10	1.00	16	22	112
2.50	0.10	4.00	0.10	0.75	22	13	67
3.00	0.10	4.00	0.10	0.50	32	7	37
4.00	0.10	6.00	0.10	1.00	36	11	56
5.00	0.15	8.00	0.15	1.50	43	13	67
6.00	0.10	8.00	0.10	1.00	64	7	37
8.00	0.10	10.00	0.10	1.00	100	5	28
9.00	0.15	12.00	0.15	1.50	96	7	37
10.00	0.15	12.00	0.15	1.00	144	4	22

MBR = Minimum Bend Radius (mm) | W/P = Working Pressure | B/P = Burst Pressure

Standard imperial sizes

ID	ID (mm)	ID tol. +/- (mm)	OD	OD (mm)	OD tol. +/- (mm)	W (mm)	MBR	W/P @ 23°C (bar)	B/P @ 23°C (bar)
1/32"	0.79	0.10	1/16"	1.59	0.10	0.40	7	22	113
1/16"	1.59	0.10	1/8"	3.18	0.10	0.79	13	22	111
1/8"	3.18	0.15	1/4"	6.35	0.15	1.59	26	22	112
5/32"	3.97	0.15	1/4"	6.35	0.15	1.19	34	13	67
3/16"	4.76	0.10	1/4"	6.35	0.10	0.79	51	7	37
1/4"	6.35	0.15	3/8"	9.53	0.15	1.59	57	11	56
3/8"	9.53	0.20	1/2"	12.70	0.20	1.59	102	7	37
1/2"	12.70	0.20	5/8"	15.88	0.20	1.59	159	5	28
5/8"	15.88	0.25	3/4"	19.05	0.25	1.59	228	4	22
7/8"	22.22	0.30	1"	25.40	0.30	1.59	311	3	16

MBR = Minimum Bend Radius (mm) | W/P = Working Pressure | B/P = Burst Pressure

Although the size range above satisfies most applications, many more sizes and custom dimensions are possible to suit your specific needs.

+44 (0)1785 859 054 | enquiries@polyflon.co.uk | www.polyflon.co.uk

16 Raleigh Hall, Eccleshall, Stafford, ST21 6JL



IN FLUOROPOLYMERS