


PFA Tubing

PFA tubing is available from Polyflon in a wide range of metric and imperial sizes. Very long continuous lengths and smooth internal surfaces together with very low levels of metal ion contamination make PFA tubing suitable for use in high purity environments.

Broad chemical resistance and impressive mechanical performance at high temperatures allow PFA tubing to be used in some of the harshest applications from downhole oil well instrumentation through to highly corrosive chemical manufacture.

PFA tubing availability

- Long continuous lengths on spools or in coils
- Thermoformed into custom 2D shapes
- Tip forming: flanges, flares, draw downs, complex micro-moulded ends
- Ready assembled with connectors
- Straight pieces with clean, square cuts
- Bagged directly off extruder to maintain cleanliness
- Pigmentations, striped or solid
- High purity (HP) grades

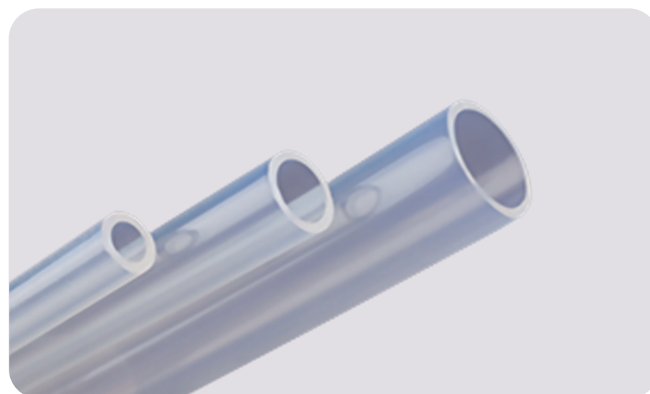

Key features



Very wide temperature range from -260°C (-436°F) to 260°C (500°F)



Good mechanical strength at elevated temperatures



Excellent chemical resistance



Low gas diffusion



UL 94 V-O flammability rating, LOI 95%



Smooth internal surfaces



Good clarity, refractive index 1.34



Gamma & EtO sterilisable



Physiologically harmless



FDA & USP Class VI compliant



Inherent purity

Standard metric sizes

ID	ID tol. +/-	OD	OD tol. +/-	W	MBR	W/P @ 23°C (bar)	B/P @ 23°C (bar)
2.00	0.10	4.00	0.10	1.00	16	28	140
2.50	0.10	4.00	0.10	0.75	22	16	84
3.00	0.10	4.00	0.10	0.50	32	9	46
4.00	0.10	6.00	0.10	1.00	36	14	70
5.00	0.15	8.00	0.15	1.50	43	16	84
6.00	0.10	8.00	0.10	1.00	64	9	46
8.00	0.10	10.00	0.10	1.00	100	7	35
9.00	0.15	12.00	0.15	1.50	96	9	46
10.00	0.15	12.00	0.15	1.00	1	5	28

MBR = Minimum Bend Radius (mm) | W/P = Working Pressure | B/P = Burst Pressure

Standard imperial sizes

ID	ID (mm)	ID tol. +/- (mm)	OD	OD (mm)	OD tol. +/- (mm)	W (mm)	MBR	W/P @ 23°C (bar)	B/P @ 23°C (bar)
1/32"	0.79	0.10	1/16"	1.59	0.10	0.40	7	22	113
1/16"	1.59	0.10	1/8"	3.18	0.10	0.79	13	22	111
1/8"	3.18	0.15	1/4"	6.35	0.15	1.59	26	22	112
5/32"	3.97	0.15	1/4"	6.35	0.15	1.19	34	13	67
3/16"	4.76	0.10	1/4"	6.35	0.10	0.79	51	7	37
1/4"	6.35	0.15	3/8"	9.53	0.15	1.59	57	11	56
3/8"	9.53	0.20	1/2"	12.70	0.20	1.59	102	7	37
1/2"	12.70	0.20	5/8"	15.88	0.20	1.59	159	5	28
5/8"	15.88	0.25	3/4"	19.05	0.25	1.59	228	4	22
7/8"	22.22	0.30	1"	25.40	0.30	1.59	311	3	16

MBR = Minimum Bend Radius (mm) | W/P = Working Pressure | B/P = Burst Pressure

Although the size range above satisfies most applications, many more sizes and custom dimensions are possible to suit your specific needs.

+44 (0)1785 859 054 | enquiries@polyflon.co.uk | www.polyflon.co.uk

16 Raleigh Hall, Eccleshall, Stafford, ST21 6JL

